

OS-I5-DEN8M-AELST-R | 8MP WDR IR Dome Network Camera



- 1/2.5" 8Megapixel progressive scan STARVISTM CMOS
- H.265&H.264 dual-stream encoding
- 15fps@4K(3840×2160), 25/30fps@3M(2304×1296)
- Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS), DMSS
- 2.7mm ~12mm motorized lens
- Max. IR LEDs Length 50m
- Micro SD card memory, IP67, IK10, PoE



System Overview

With upgraded H.265 encoding technology, Eco-savvy series brings high efficient video compression capability. It can save bandwidth and storage. Meanwhile, the series features starlight, smart IR technology and intelligent image analysis techniques. This series supports reminder function, meanwhile fully protected from dust and water, certified to IP67 and vandal resistant to IK10 standard.

Functions

ePoE technology

The ePoE technology of Dahua, designed internally, adopts advanced 2D-PAM3 coding modulation from physical layer, and realizes full duplex transmission over 800 meters at the speed of 10Mbps, or 300 meters at the speed of 100Mbps via Cat 5 or coaxial cable media. Besides, it supports PoE and PoC power supply technology which has greatly simplified construction and wiring. Dahua ePoE technology offer a new way to accomplish long distance transmission between IP camera and network switch. It allows more flexible surveillance system design, improves reliability and saves construction and wiring cost.

4K technology

4K technology as a revolutionary breakthrough in image, which enhance the expressive image of essence, allowing users to experience the best picture quality brought about by the visual feast. For the purposes of 4K surveillance with four times the 1080P resolution, presented to the user with more details. Under the same scenario by raising the pixels, reduce the camera cost.

Wide Dynamic Range

The camera achieves vivid images, even in the most intense contrast lighting conditions, using industry-leading wide dynamic range (WDR) technology. For applications with both bright and low lighting conditions that change quickly, true WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Intelligent Video System (IVS)

IVS is a built-in video analytic algorithm that delivers intelligent functions to monitor a scene for Tripwire violations, intrusion detection, and abandoned or missing objects. A camera with IVS quickly and accurately responds to monitoring events in a specific area. In addition to scene analytics, the camera supports face detection to quickly capture a face and upload the image to a server. The camera also offers tamper detection by recognizing a dramatic scene change and generating a warning message to inspect the camera.

Protection (IP67, IK10, wide voltage)

The camera allows for $\pm 30\%$ input voltage tolerance, suitable for the most unstable conditions for outdoor applications. Its 6KV lightning rating provides effective protection for both the camera and its structure against lightning. Subjected and certified to rigorous dust and immersion tests (IP67) and impact tests (IK10), the camera is the choice for installation in even the most unforgiving environments.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

OS-I5-DEN8M-AELST-R | 8MP WDR IR Dome Network Camera

Technical Specifications

Camera					
Image Sensor		1/2.5" 8Megapixel progressive scan CMOS			
Effective Pixels		3840(H)x2160(V)			
RAM/ROM		512MB/32MB			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual, 1/3~1/100000s			
Minimum Illumination		0.05Lux/F1.4 (Color,1/3s,30IRE) 0.2Lux/F1.4 (Color,1/30s,30IRE) 0Lux/F1.4(IR on)			
S/N Ratio		More than 50dB			
IR Distance		Distance up to 50m (164ft)			
IR On/Off Control		Auto / Manual			
IR LEDs		2			
Lens					
Lens Type		Motorized/ Auto Iris(DC)			
Mount Type		Board-in			
Focal Length		2.7mm~12mm			
Max. Aperture		F1.4			
Angle of View		H:110°~40° , V:58°~23°			
Optical Zoom		4x			
Focus Control		Motorized			
Close Focus Distance		0.3m			
Dori Distance					
Note: The DORI distance is a “general proximity” of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.					
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	85m(280ft)	34m(112ft)	17m(56ft)	8.5m(28ft)
	T	228m(748ft)	91m(299ft)	46m(151ft)	23m(75ft)
Pan/Tilt/Rotation					
Pan/Tilt/ Rotation		Pan:0°~355°; Tilt:0°~75°; Rotation:0°~355°			
Intelligence					
IVS		Tripwire, Intrusion, Object Abandoned/Missing			
AIF		Face Detection			

Video	
Compression	H.265+/H.265/H.264+/H.264
Streaming Cap	3 Streams
Resolution	4K(3840×2160)/6M(3072×2048)/5M(3072×1728) / 5M(2592×1944)/ 4M(2688×1520)/ 3M(2048×1536)/ 3M(2304×1296)/ 1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/ D1 (704 ×576/704×480)/ VGA(640×480)/ CIF(352×288/352×240)
Frame Rate	Main Stream: 4K(1~15fps)/3M(1~25/30fps), Sub Stream: D1(1~25/30fps), Third Stream: 720P (1~25/30fps)
Bit Rate Control	H.264: 24K ~ 10240Kbps H.265: 14K ~ 984Kbps CBR/VBR
Day/Night	Auto(ICR) / Color / B/W
BLC Mode	BLC / HLC / WDR
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control	Auto/Manual
Noise Reduction	3D DNR
Motion	Off / On (4 Zone, Rectangle)
ROI	Off / On (4 Zone)
EIS	N/A
Smart IR	Support
Defog	N/A
Digital Zoom	16x
Flip	0°/90°/180°/270°
Mirror	Off / On
Privacy Masking	Off / On (4 Area, Rectangle)
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4v6 QoS; UPnP NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Interoperability	ONVIF, PSIA, CGI
Streaming Methode	Unicast / Multicast
Max. User Access	10 Users /20 Users
Edge Storage	NAS, Local PC for instant rec. , MSD card 128GB
Web Viewer	IE, Chrome, Firefox, Safari
Software	Smart PSS, DSS, Easy4ip
Smart Phone	IOS, Android

OS-I5-DEN8M-AELST-R | 8MP WDR IR Dome Network Camera

Technical Specifications





Audio	
Compression	G.711a/ G.711Mu/ AAC/ G.726
Certifications	
Certifications	CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B
Interface	
Video Interface	N/A
Audio Interf.	1/1 channel In/Out
RS485	N/A
Alarm	1 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Electrical	
Power Supply	DC12V, PoE(802.3af)(Class 0)
Consumption	<8.5W

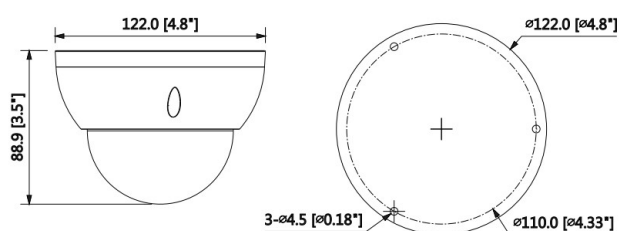
Environmental	
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10
Construction	
Casing	Metal
Dimensions	Φ122mm×88.9mm (4.8"×3.5")
Net Weight	0.5kg (1.1lb)
Gross Weight	0.58kg (1.29lb)

Accessories (optional)

Junction Box: PFA137	Pole Mount: PFA152-E
	
Wall Mount: PFB203W	In-ceiling Mount: PFB200C
	
ePoE Over Coax Converter: LR1002	
	

Dimensions (mm/inch)

Junction Mount	In-ceiling Mount
	
Wall Mount	Pole Mount
	



* The information contained in this document (photos, drawings, dimensions, specifications) may be subject to change without prior notice.

** Copyright© Osiris Security. All rights reserved. The information in this document can not be published, rewritten or republished in any form. If you wish to use the text or images in this document for commercial reasons, please contact marketing@osiris-security.com