



# DMCL05, DMCL05-J

## Conventional manual call point. CE certified

- DMCL05: Conventional manual call point with LED
- DMCL05-J: Conventional manual call point with led yellow colour
- CE certified according to CPD

**DMCL05 and DMCL05-J** manual call points are devices of transmission of an **alarm** status (normative red colour) or **extinguishing command** (normative yellow colour) towards **conventional indicating panel**. This action is carried out by the operator through mechanical pressure on the window located in the front. Return to the normal status can be done only after **local resetting using a special key**.

Usually, connection is carried out with **shielded cable from 0,5mm<sup>2</sup> to 2,5mm<sup>2</sup>** for conventional systems following the indications screen printed on the printed circuit. Shield must be **protected** by an insulator tape in order to avoid any short-circuit.



### Main characteristics

- CE certified according to CPD
- Conform with the norm EN54-11
- Key for reset
- Separate key for test
- No break glass


Power supply specification	
Main supply voltage	13V to 30Vdc
Nominal main supply voltage	20Vdc
Quiescent current	0 µA
Alarm current	35mA @ 24Vdc
Mechanical characteristics	
Unit weight	140g
Unit dimensions (in mm)	99 x 98 x 49
Unit row material	ABS
Unit colour	Red
Protection class	IP33
Climatic characteristics	
Operating temperature	-10°C to +60°C
Storage temperature	+10°C to +50°C
Operating relative humidity	≤ 93%
Storage relative humidity	≤ 85%




# DMCL05, DMCL05-J

## Conventional manual call point. CE certified

### Connection diagram

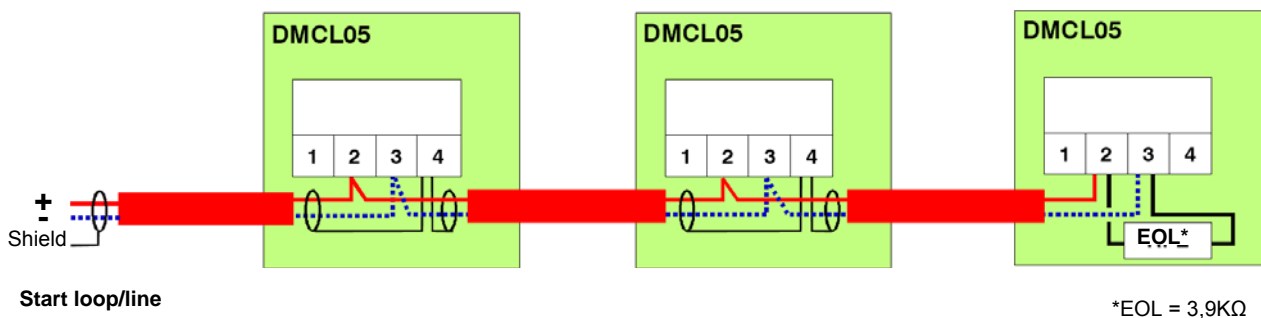

- 1/ All cables shall be protected by cover.
- 2/ Cables should be exposed of at least 8mm.
- 3/ End of line resistor is provided with FDS panel.

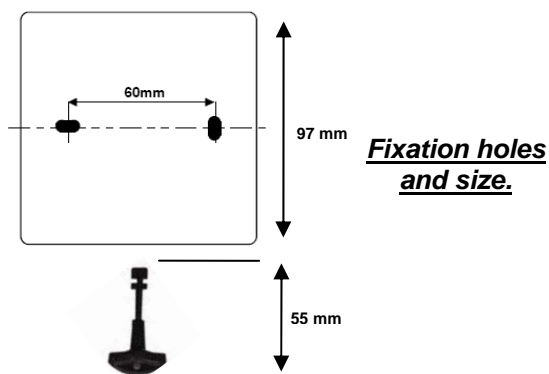

Test key



Reset key



Plastic base for flush mounting  
(Red colour)

STS 6535



**WATERPROOF IP65 HOUSING BOX**  
including conventional manual call  
point with reset.

### REFERENCE

DMCL05  
DMCL05-J  
STS6535

### ACCESSORIES

PEDM  
VPDM  
KCTDM  
CTDM

### DESCRIPTION

Conventional manual call point resettable with led, EN54-11, CE certified according to CPD  
Conventional manual call point resettable with led, EN54-11, CE certified according to CPD Yellow colour  
Waterproof IP65 housing box for conventional manual call point with reset (provided without MCP)

Plastic base for flush mounting MCP, double action  
Transparent lift-up protective cover for MCP, double action  
Kit of 10 reset keys for MCP  
Test Key