

OS-NVR8M8P-4H1-4KL | 8 Channel Smart 1U 1HDD 8PoE Network Video Recorder



- New 4.0 user interface, Security baseline 2.1
- H.264, H.265, Smart H.264+, and Smart H.265+. H.265 auto switch
- Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding
- Supports mainstream cameras of ONVIF and RTSP protocols
- P2P remote surveillance, video play on mobile device
- VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
- Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches



System Overview

Osiris NVR4000-4KS2/L is introduced as the Lite series NVR that supports for 4K and H.265 encoding technology with excellent performance at an affordable price. For applications where image details are highly required, it delivers the capability of 4K resolution processing. The NVR can be served as edge storage, central storage or backup storage with an intuitive shortcut operation menu for remote management and control. Due to its cost-effective and easy-to-install design, this NVR is ideal for a wide range of applications such as public safety, water conservancy, transportation, city centers, education, and financial institutions. The NVR is compatible with numerous third-party devices making it the perfect solution for surveillance systems that work independently of video management system (VMS). It features an open architecture that supports for multi-user access and is compatible with ONVIF Profile S, T, G protocol, enabling interoperability with IP cameras.

Functions

Perimeter Protection by Camera

Automatically filtering out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improving alarm accuracy.

Face Detection by Camera

Face detection is to detect if there is any human face appearing in the video. This technology adopts a deep learning algorithm to support face detection, tracking, optimization and capturing, and then output the best face snapshot.

SMD Plus by Camera

With intelligent algorithm, Osiris Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

People Counting by Camera

With deep learning algorithm, Osiris People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/weekly/daily reports to meet your requirements.

Smart Codec

With advanced scene-adaptive rate control algorithm, Osiris smart codec technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

DMSS

The DMSS app is available on the iOS App Store and Google Play. It makes surveillance easy and simple, allowing you to remotely access back-end devices, view live video, receive event push notifications, and search for recorded videos from an iPhone, iPad, or Android phone at anytime from virtually anywhere.

OS-NVR8M8P-4H1-4KL | 8 Channel Smart 1U 1HDD 8PoE Network Video Recorder

Technical Specifications

System	
Main Processor	Industrial-grade embedded processor
Operating System	Embedded LINUX
Operating Interface	Web/operating in local GUI
Perimeter Protection by Camera	
Performance	8 channels
AI-Search	Search for pictures by channel, time and event type
Face Detection by Camera	
Performance	4 channels
Face Attributes	6 attributes: Gender, age, glasses, expression, mouth mask and beard
AI Search	Search for pictures by channel, time and face attributes
SMD Plus by Camera	
Performance	8 channels
AI Search	Search by target classification (human, vehicle)
Video	
Access Channel	8
Network Bandwidth	Access: 80 Mbps; Storage: 80 Mbps; Forward: 60 Mbps
Resolution	8MP; 6MP; 5MP; 4MP; 3MP; 1080p; 720p; D1
Decoding Capability	8 × 1080p@30 fps
Video Output	1 × VGA output, 1 × HDMI output, supports simultaneous video sources output for VGA and HDMI
Multi-screen Display	1 , 4 , 8 , 9 views
Third-party Camera Access	ONVIF; RTSP
Compression	
Video	Smart H.265/H.265/Smart H.264/H.264/MJPEG
Audio	PCM/G711A/G711U/G726/AAC
Network	
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search (Support Osiris IP camera; DVR; NVS; etc.); P2P; auto register
Mobile Phone Access	Android; iOS
Interoperability	ONVIF(profile T/S/G); CGI; SDK
Browser	Chrome; IE9 or later; firefox


Record Playback	
Multi-channel Playback	Up to 8 channels for playback
Record Mode	Manual record; alarm recording; SMD recording; smart recording
Storage	Local HDD; network
Backup	USB storage device
Playback Function	1. Play/pause/stop/slow/quick/backward/by frame 2. Full screen, backup (video clip/file), partial zoom in, and audio on/off
Storage	
Disk Group	Yes
Alarm	
General Alarm	Motion detection, privacy masking, video loss, scene changing, PIR alarm, IPC external alarm
Anomaly Alarm	Camera disconnection, storage error, disk full, IP conflict, MAC conflict, login locked, and cybersecurity exception
Intelligent Alarm	Face detection, perimeter protection (intrusion and tripwire), IVS, people counting, heat map, and SMD alarms
Alarm Linkage	Recording, snapshot, audio, buzzer, log, preset, and email
External Port	
Audio Input	1 × RCA input
Audio Output	1 × RCA output
HDD	1 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature
USB	2 (2 × back USB2.0)
HDMI	1 (supports up to 4K resolution output)
VGA	1
Network	1 × RJ-45, 10/100 Mbps self-adaptive Ethernet port
PoE	8
General Parameter	
Power Supply	DC48V/53V, 2A/1.8A
Power Consumption	< 10 W (HDD not included, idling) Total output power of PoE is 72W, the maximum output power of a single port is 25.5W
Net Weight	0.70 kg (1.54 lb)
Gross Weight	1.80 kg (3.97 lb)

OS-NVR8M8P-4H1-4KL | 8 Channel Smart 1U 1HDD 8PoE Network Video Recorder


Technical Specifications

Dimensions (mm/inch)

General Parameter	
Product Dimensions	270 mm × 206.5 mm × 47.5 mm (10.63" × 8.13" × 1.87") (W × L × H)
Package Dimensions	96 mm × 427 mm × 262 mm (3.78" × 16.81" × 10.31") (W × L × H)
Operating Conditions	−10 °C to +50 °C (+10 °F to +122 °F)
Storage Conditions	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	10%~93%
Storage Humidity	30%~85%
Operating Altitude	3000 m (9842.52 ft)
Installation	Desktop mounted
Certifications	CE: EN62368-1; EN55032, EN55024, EN55035, EN61000-3-2, EN61000-3-3 EN50130-4 / FCC: Part 15 Subpart B

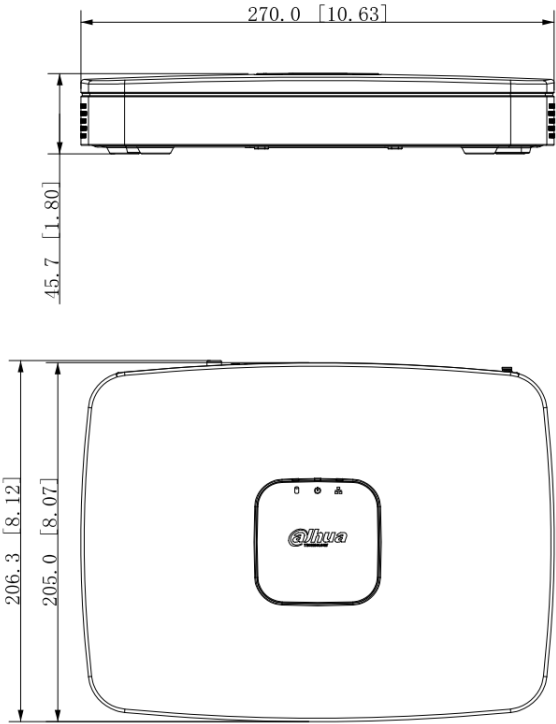

Panels

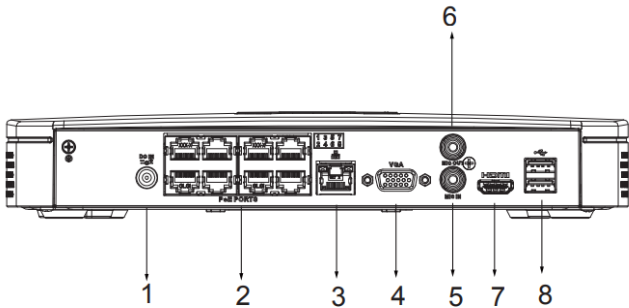

- | | | | |
|---|-------------------------|---|--------------------------|
| 1 | DC Power Input | 2 | PoE Ports |
| 3 | Network Port | 4 | VGA Port |
| 5 | AUDIO IN, RCA Connector | 6 | AUDIO OUT, RCA Connector |
| 7 | HDMI Port | 8 | USB Port |

* The information contained in this document (photos, drawings, dimensions, specifications) may be subject to change without prior notice.
** Copyright© Osiris Security. All rights reserved. The information in this document can not be published, rewritten or republished in any form. If you wish to use the text or images in this document for commercial reasons, please contact marketing@osiris-security.com